


ADAPTOR

Application

- Flameproof (Ex 'd') & Increased Safety (Ex 'e')
- Connection between cable entry devices and equipment having dis-similar threads.
- Male, Female threads : Metric, NPT
- Materials : Brass / Brass with Nickel plated / Stainless Steel 316
- Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X

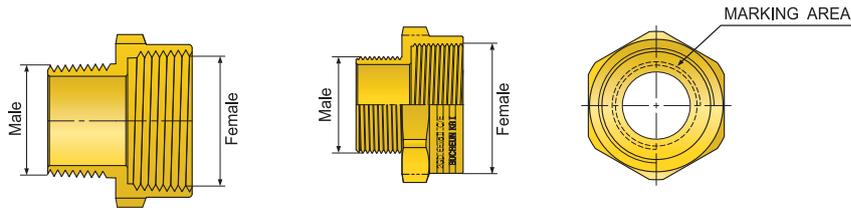

**ATEX
IECEX
KOSHA**



		Female Thread																						
		METRIC										NPT												
Male Thread	METRIC	M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"		
		NPT	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"												
			3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"													
			1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"														
			1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"															
			1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"																
			2"	2 1/2"	3"	3" 3/4"	4"																	
			2 1/2"	3"	3" 3/4"	4"																		
			3"	3" 3/4"	4"																			
			3" 3/4"	4"																				
	4"																							




II 2GD Ex d II C Ex e II Ex tD A21 IP66/IP67 (-60°C ≤ ta ≤ +100°C)

REDUCER

Application

- Connection between cable entry devices and equipment having dis-similar threads.
- Male, Female threads : Metric to Metric, Metric to NPT, NPT to NPT, NPT to Metric
- Flameproof (Ex 'd') & Increased Safety (Ex 'e')
- Ingress Protection : IP66
- Operating Temperature : -60°C to +100°C
- Materials : Brass, Brass with Nickel plated, Aluminum & Stainless Steel 316(L)
- Certificate No : Baseefa08 ATEX 0019X / IECEx BAS08.0008X.
GOST-R No. 0758861

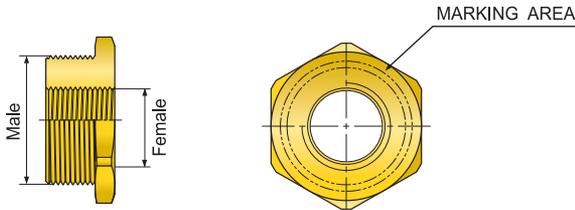

		Female Thread (*)																						
		METRIC										NPT												
		M16	M20	M25	M32	M40	M50	M63	M75	M80	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3" 3/4"	4"		
Male Thread (*)	METRIC	M16																						
		M20	⊗																					
		M25	⊗	⊗																				
		M32	⊗	⊗	⊗																			
		M40	⊗	⊗	⊗	⊗																		
		M50	⊗	⊗	⊗	⊗	⊗																	
		M63	⊗	⊗	⊗	⊗	⊗	⊗																
		M75	⊗	⊗	⊗	⊗	⊗	⊗	⊗															
		M80	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗														
		M90	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗													
		M100	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗												
Male Thread (*)	NPT	1/2"	⊗																					
		3/4"	⊗	⊗																				
		1"	⊗	⊗	⊗																			
		1 1/4"	⊗	⊗	⊗	⊗																		
		1 1/2"	⊗	⊗	⊗	⊗	⊗																	
		2"	⊗	⊗	⊗	⊗	⊗	⊗																
		2 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗															
		3"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗														
		3 1/2"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗													
		4"	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗	⊗												

* PF Threads are available KGS Ex-proof certificate.

How to order

DARE - M25 x N1/2"



II 2GD Ex db II C Ex eb II C Extb II C IP66 Baseefa08ATEX0019X IECEx BAS08.0008X
DARE-NxxMxx xx(M)x xx(F) 2011/03 DONG-A Bucheon KR CE1180

REDUCER SELECTION TABLE

Female Thread

		Metric											NPT											
		M16	M20	M25	M32	M40	M50	M63	M75	M80	M85	M90	M100	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	
Male Thread	Metric																							
	M16																							
	M20																							
	M25																							
	M32																							
	M40																							
	M50																							
	M63																							
	M75																							
	M80																							
	M85																							
	M90																							
M100																								
NPT																								
1/2"																								
3/4"																								
1"																								
1 1/4"																								
1 1/2"																								
2"																								
2 1/2"																								
3"																								
3 1/2"																								
4"																								



Part No. Changed



Part No. Added